

7230

Incrément/pas 0.0254/
Inkrement/Schritt 0.0508 mm
Increment/step 0.001/0.002"


Diamètre
Durchmesser 63 x 63 mm
Diameter

Poids
Gewicht 450 g
Weight

Force max.
Max. Kraft 146 N (0.001")
Max. force 104 N (0.002")







		Résistance de phase Phasenwiderstand Phase resistance Ω	Induct. de phase Phaseninduktivität Phase inductance mH	Courant de phase Phasenstrom Phase current A	Force max. Max. Kraft Max. force N	Puissance nominale Nennleistung Nominal power W
unipolar	7230-4-5 (0.001")	5	5.5	1	142	10
	7230-4-5 (0.002")	5	5.5	1	106	10
	7230-4-25 (0.001")	25	22.4	0.48	146	11.5
	7230-4-25 (0.002")	25	22.4	0.48	106	11.5

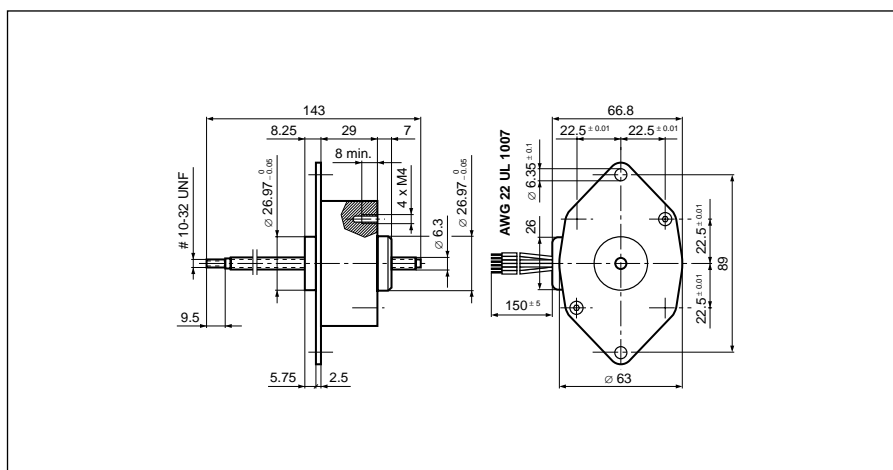

Course max. Maximaler Weg Max. travel length	76.2 mm
Classe d'isolation Isolationsklasse Insulation class	E 120 °C
Protection Schutzart Protection	DIN 40050 IP 30
Tension d'essai Prüfspannung Test voltage	500 VAC

Caractéristiques dynamiques
Dynamische Daten
Dynamic characteristics

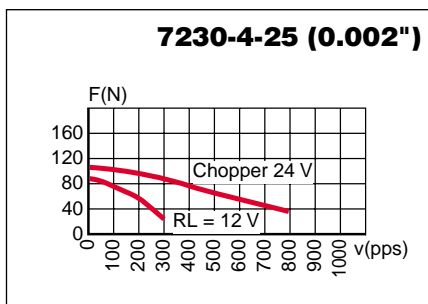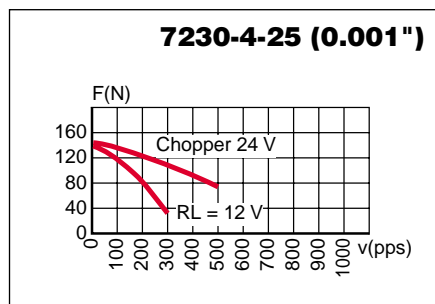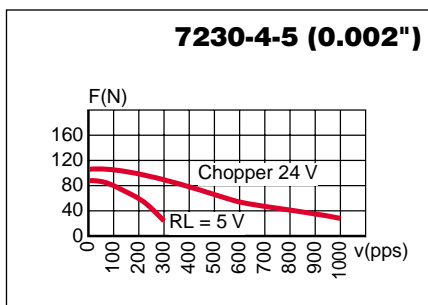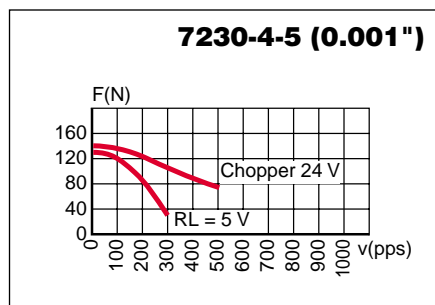

Possibilités d'exécutions adaptées sur demande.

Auf Wunsch werden kundenspezifische Anforderungen berücksichtigt.

Special requirements can be made to customer specification.

SONCEBOZ SA


CH-2605 Sonceboz

Tél: +41 32 488 11 11

Fax: +41 32 488 11 00

E-Mail: info@sonceboz.com

Internet: www.sonceboz.com



SONCEBOZ

The driving force